


**User Manual for iBOX®  
Biometric Lock Box**

**PARTS OF THE LOCK BOX**

Top Of Lock Box


- A. Cable Slot
- B. Indicator Light
- C. Fingerprint Scanner

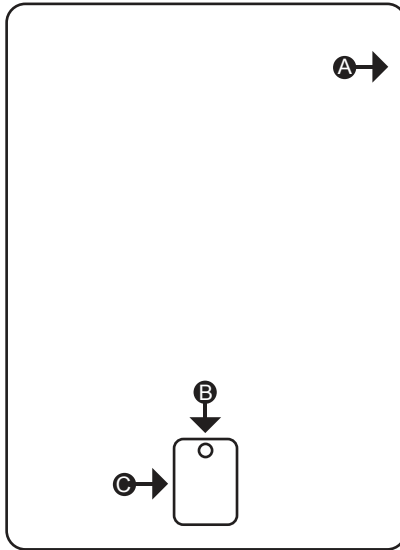

Bottom Of Lock Box

Remove Cover to Expose

- D. Battery Compartment
- E. Keypad
- F. Key Access

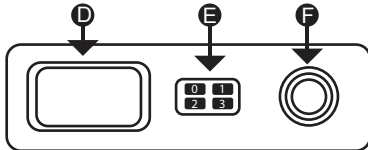

**WARNING**

Avoid leaving lock box door open and unattended; it will allow unauthorized individuals to reprogram the lock box, gaining full access to the safe and the contents.

**BATTERY**

1. Locate the battery compartment, it is held in by 1 screw. Remove screw and battery compartment cover.
2. Slide battery holder out of compartment.
3. Place 4, AA batteries and pay attention to the polarity of each battery.
4. Gently slide battery cover back into place and tighten screw.

Note: Do not mix old and new batteries.

**CREATING PERSONAL PIN CODE**

Lock Box Default Pin Code: 1230  
Retains 1 Pin Code, 4 - 11 digits  
Personal Pin Code CANNOT start with "0"

1. Open battery compartment and locate keypad.
2. Enter current Pin Code then press the number "3" key.
3. Insert your new Pin Code, If Pin Code is shorter than 11 digits insert key into key lock and turn counter clockwise to complete setup. Long beep will be heard when setup is complete.
4. Use your registered Pin Code to open the lock box. If lock box does not open then Pin Code was not registered. Repeat steps above to create personal pin code.

**REGISTERING A FINGERPRINT**

If red flashes are seen when accessing the lock box, then lock box is in Factory Default Mode: ANY fingerprint can open the lock box.

Retains 30 Fingerprints

1. Open battery compartment and insert key into key lock and turn counter clockwise.
2. Place Fingerprint on Fingerprint scanner, 2 beeps will be heard. Fingerprint is now registered to the lock box.
3. Use your registered Fingerprint to open the lock box. If lock box opens but a red light is seen and several beeps is heard then registration was unsuccessful. Repeat steps above to register fingerprint.

**OPENING THE LOCK BOX**

Internal light will active when the lid of the lock box is opened.

Fingerprint

Place Fingerprint on Fingerprint Scanner and lock box will unlock.

Pin Code

Remove battery compartment cover. Enter in current pin code, and lock box will unlock.

Key

Remove battery compartment cover. Insert key into key hole and lock box will unlock.

**DELETING PIN CODE/ALL FINGERPRINTS**

1. Remove battery compartment cover.
2. Take 1 out battery, turn key in key hole and hold this position in place, replace the 1 battery back into place and wait for 3 beeps. After 3rd beep lock box is reset.

Lock box is in Factory Default Mode ANY fingerprint can open the lock box. Lock Box Default Pin Code: 1230

**SOUND OPTION**

To Turn Sound Off:

Turn Key in Key hole counter clock wise and hold for 5 seconds 2 Beeps will be heard and lock box is now in silent mode.

Note: Registration process and door open alarm will still have sound.

To Turn Sound On:

Turn Key in Key hole counter clock wise and hold for 5 seconds 2 Beeps will be heard and lock box is now in audio mode.

**DOOR OPEN ALARM**

When lock box door is unlocked/opened, after 1 min there will be a constant beep to remind you to close the door.

**LOW BATTERY ALARM**

With the lock box open and an alarm is heard and red light is seen then battery of the unit is low. Please replace batteries as soon as possible. If the battery voltage is too low the lock box will not open and no alarm will be heard.


See reverse side for more information

## USING THE CABLE

Included with the lock box is a steel cable that may be attached to any stationary item for increased security. The cable hole is located on the side of the lock box.

### Installing the Cable

1. Locate the stationary item you would like the lock box to be attached to and wrap the cable around the stationary item.
2. Thread one end of the cable through the other loop of the cable. The loop that was just created in this step should be wrapped around the stationary item.
3. Open lock box by using the personal pin code or access key.
4. Locate the cable slot.
5. Place the unused loop of the steel cable with the with the metal stopper portion in the lock box through the cable slot.
6. Close lock box and ensure that the lock box is locked.
7. Slightly tug on the cable to ensure that the cable is securely attached to the lock box.

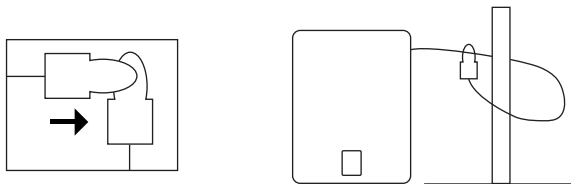

### Removing the Cable

1. Open lock box by using the personal pin codes or access key.
2. Lift steel cable out of the cable slot.
3. Pull the one end of the cable through the other loop of the cable.
4. Store cable in a safe place.

## CARE AND MAINTENANCE

- If necessary use a damp cloth to clean the lock box. DO NOT use chemicals or cleaning agents.
- Keep liquids away from the control panel. Spills on the control panel will cause damage and possibly electric shock.
- Secure lock box in a proper area to prevent it from falling and causing damage or injury.
- For security purposes, change the factory default code as soon as possible.
- DO NOT over stuff the contents of the lock box, it can damage the motor mechanism or the contents.
- DO NOT disassemble the product. For all repairs and maintenance, contact authorized service centers or distributor BARSKA Customer Service.
- DO NOT place emergency keys inside of lock box.



## 1 YEAR LIMITED WARRANTY

### LOCK BOX

BARSKA warrants this new item to be free of original defects in material and/or workmanship under normal use for a period of twelve (12) months from the date product is received by purchaser. This warranty does not include damage caused by improper installation or maintenance. Damage from misuse, abuse, accident (such as dropping), normal wear and tear, fire, flood, or acts of nature. Damage from service or repairs other than those performed by BARSKA. Labor, cost and shipping charges for the removal and replacement of defective parts beyond the initial twelve-month warranty period. All transportation and shipping charges. Removing or altering the seal under any circumstances will automatically void the warranty.

This warranty is limited to original purchaser and is not transferable. This warranty applies only to products purchased in the United States.

Please email [info@barska.com](mailto:info@barska.com) or call 1.888.666.6769 for Return Merchandise Number (RMA#) before any returns. The RMA number must appear on the outside of the shipping package. Product must be packed carefully and sturdily in its original packaging to prevent damage in transit and returned freight pre-paid to:

BARSKA OPTICS  
Repair Department  
855 Towne Center Drive  
Pomona, CA 91767

Please include all of the following when returning BARSKA products for service and/or replacement:

1. Please write your complete details (Name, Address, Telephone #, E-mail address, RMA#, etc.)
2. Purchase receipt or Proof of Purchase. (Original/Copy)
3. A brief explanation of the defect.
4. A Check/Money Order of \$15.00 to cover inspection, shipping and handling.

\*Please allow 6-8 weeks for delivery.

BARSKA will examine and test returned product and repair or replace defective part(s) or units with new part(s) or a new unit if necessary within the warranty period. Purchaser is required to remit \$15.00 to BARSKA for return shipping and handling at time product is returned. If repair is required after warranty period expiration, purchaser will be charged for replacement parts and return shipping.

BARSKA® Optics shall not be liable for any consequential, incidental and/or contingent damages whatsoever. We will not pay shipping, insurance or transportation charges from you to us, or any import fees, duties and or taxes. This warranty supersedes all previous BARSKA® Optics warranties.